




# Specification Sheet

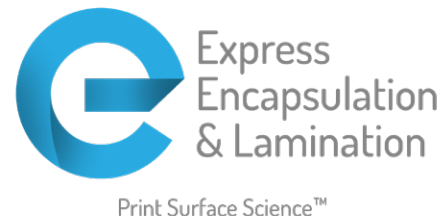

Suitable for digital, laser and offset litho printing.

## Tough 350

OS – Front Side, RS – Reverse Side, L – Machine direction, Q – Cross direction

	Test Method	Unit	Value
<b>Physical</b>			
Thickness	ISO 4593	μm	350 ± 10
Weight	ISO 536	g/m <sup>2</sup>	485 ± 12
<b>Mechanical</b>			
Bending Stiffness MD	ISO 2493-1; 15°/10mm	mN	3400 ± 700
Bending Stiffness CD	ISO 2493-1; 15°/10mm	mN	3700 ± 600
<b>Optical</b>			
Opacity	ISO 2471	%	>98
<b>Surface</b>			
Smoothness	DIN 5627	sec	120 ± 40

For more information or a quote visit [expressencap.co.uk](http://expressencap.co.uk) or call 01179 414 999

Ironleaf has not been assessed against European Food Contact Legislation. Ironleaf should be stored in a dry place at room temperature and should avoid direct sunlight. Ironleaf is recyclable in specialist facilities such as those offered by Vanden Recycling in the UK. Some councils (such as Kent) also offer 'kerb-side' recycling of this product. Ironleaf can be burned in an incinerator with normal refuse or can be buried in a landfill. Any disposal method should comply with appropriate local and country regulations. The specification values are correct at time of publishing. We reserve the right to change the specification without warning. Please carry out your own tests before use. See our website Terms and Conditions for further information.